
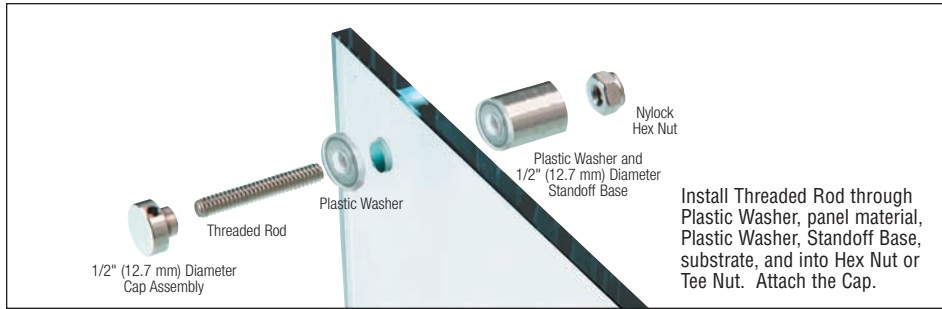


CRL 1/2" (12.7 mm) Diameter Standoff Mounting Options

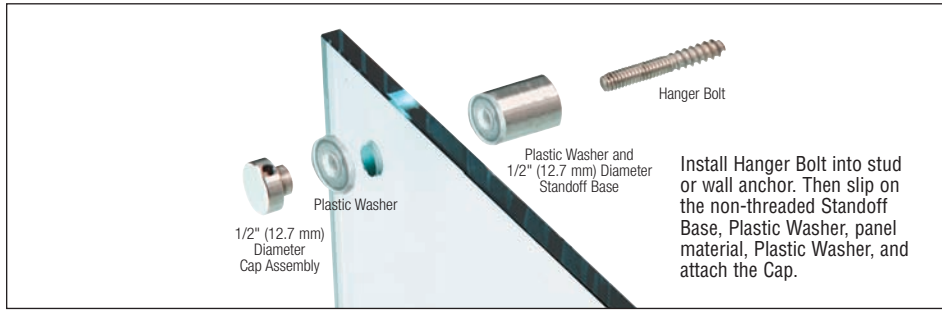

Tighten Cap down by using CRL Cat. No. 666564 Drill Bit. Insert into the side hole and tighten until snug. **NOTE:** Do not over tighten.

Due to the diversified variety of applications, weight limitations for Standoff Systems are dependent upon wall or substrate anchoring and material strengths.

CRL Mounting Accessories for 1/2" (12.7 mm) Diameter Standoffs

Hanger Bolts can be used in wood, or with plastic anchors.



HANGER BOLTS

CAT. NO.	FINISH	SIZE
HB10241Z	Zinc	10-24 x 1" (25.4 mm)
HB1024112Z	Zinc	10-24 x 1-1/2" (38.1 mm)
HB10242Z	Zinc	10-24 x 2" (50.8 mm)
HB1024212Z	Zinc	10-24 x 2-1/2" (63.5 mm)

Minimum order: 1 each.

Hex Nuts are used with applicable Flat Washers and/or Lock Washers to attach Standoffs, or to reshape threads after cutting Threaded Rod or Allen Screws.



HEX NUTS

CAT. NO.	FINISH	SIZE
HN1024S	Stainless	10-24

Minimum order: 1 each.

Use Flat Washers with Hex Nuts when attaching Standoffs to panels or substrates.



FLAT WASHERS

CAT. NO.	FINISH	SIZE
FW10S	Stainless	10-24

Minimum order: 1 each.

Lock Washers may be used with Hex Nuts for mounting Standoff assemblies.



LOCK WASHERS

CAT. NO.	FINISH	SIZE
LW10S	Stainless	10-24

Minimum order: 1 each.

Nylock Hex Nuts may be used without Locking Washers for attachment to Allen Screws or Threaded Rod for 1/2" (12.7 mm) diameter Standoffs.



NYLOCK HEX NUTS

CAT. NO.	FINISH	SIZE
NLN1024S	Stainless	10-24

Minimum order: 1 each.

Tee Nuts are mainly used in wood or plywood applications where it can be installed on the back side. Accepts Allen Screw or Threaded Rod.



TEE NUTS

CAT. NO.	FINISH	SIZE
TN1024Z	Zinc	10-24

Minimum order: 1 each.

Full 36" (914 mm) lengths of stainless Threaded Rod will permit you to cut Rod to desired length.




THREADED RODS

CAT. NO.	FINISH	SIZE
TR1024X36S	Stainless	10-24 x 36" (914 mm)

Minimum order: 1 each.

Stainless Steel Allen Screws are available in 3/4" (19 mm) and 1" (25.4 mm) lengths.



ALLEN SCREWS

CAT. NO.	FINISH	SIZE
AS102434	Stainless	10-24 x 3/4" (19 mm)
AS10241	Stainless	10-24 x 1" (25.4 mm)

Minimum order: 1 each.